




NEMA 3R Rpower™ GTX Power Center with integrated revenue grade meter and 30A grid disconnect. 

Grid-Tie PV Systems

Rpower™ GTX Integrated Systems are designed to give you the advantage!

Integrated and modular design makes for a cleaner, faster and more professional installation.

System includes the key equipment you need to complete the job.

Innovative, low-profile, rack-mounted junction box provides an easy to wire and aesthetic solution.




Professional Engineer drawings simplify the permitting process.

Code compliant system includes ETL® listed Rpower™ GTX Power Center.

3-module, top-down roof mounting system allows for variable array configurations.

	Rpower™ 900GTX	Rpower™ 1250GTX	Rpower™ 1800GTX	Rpower™ 2500GTX
Rpower™ GTX Power Center				
Inverter	SMA 1800 w/display	SMA 2500 w/display	SMA 1800 w/display	SMA 2500 w/display
Disconnect	OutBack PSSB	OutBack PSSB	OutBack PSSB	OutBack PSSB
Revenue Grade Meter	Included	Included	Included	Included
30A Grid Disconnect	NEMA 3R Lockable	NEMA 3R Lockable	NEMA 3R Lockable	NEMA 3R Lockable
DC Circuit Breaker	15A 600VDC	15A 600VDC	15A 600VDC	15A 600VDC
Aluminum Back Plate	Powder Coated	Powder Coated	Powder Coated	Powder Coated
ETL® Listed	Yes	Yes	Yes	Yes
Dimensions h/w/d	22.8" x 57.8" x 11.5"	22.8" x 57.8" x 11.5"	22.8" x 57.8" x 11.5"	22.8" x 57.8" x 11.5"
Weight	130 lbs.	130 lbs.	130 lbs.	130 lbs.
Equipment and Documentation				
PV Module	SHARP 165W	SHARP 165W	SHARP 165W	SHARP 165W
Module Quantity	6	9	12	18
Roof Mounts	(2) 3-module	(3) 3-module	(4) 3-module	(6) 3-module
PV Junction Box	NEMA 4, Rack-Mounted	NEMA 4, Rack-Mounted	NEMA 4, Rack-Mounted	NEMA 4, Rack-Mounted
MC® Cables	(1) 30' MC®	(1) 50' MC®	(2) 30' MC®	(2) 50' MC®
PV Grounding	Lay In Clamps	Lay In Clamps	Lay In Clamps	Lay In Clamps
Grounding Wire	35 ft., 6AWG	50 ft., 6AWG	70 ft., 6AWG	100 ft., 6AWG
Engineering Drawing	Included	Included	Included	Included
Install/Operation Manual	Included	Included	Included	Included
Specifications and Ratings				
Array Size In Sq. Ft.	84 Sq. Ft.	126 Sq. Ft.	168 Sq. Ft.	252 Sq. Ft.
DC Watts-STC	990W	1,485W	1,980W	2,970W
DC Watts-PTC (CEC)	869W	1,304W	1,738W	2,608W
Warranty Information				
Rpower™ & System Equipment	5 Year	5 Year	5 Year	5 Year
SHARP® Power Output	25 Year	25 Year	25 Year	25 Year
List Price				
Rpower™ GTX Power System - Complete	\$8,990	\$11,990	\$14,440	\$19,990
Rpower™ GTX Power Center - Only	\$3,370	\$3,650	\$3,370	\$3,650

See your Energy Outfitter representative for Rpower™ GTX System options.

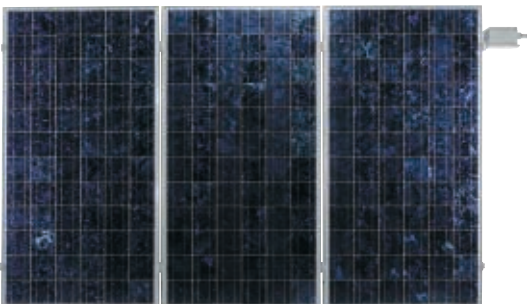

SHARP® 165 Watt Modules included!

BEST Polycrystalline PERFORMANCE

- Industry leading 14.55% cell and 12.68% module efficiency
- Quick installs w/MC® connectors and USE-2 cable
- UL® listed with 25 year power output warranty

